


**FIREFIGHTER SAFETY WARNING SIGNS FOR STRUCTURES WITH  
LIGHT-FRAME TRUSS-TYPE, FLOOR and/or ROOF CONSTRUCTION  
IN ACCORDANCE WITH  
FLORIDA ADMINISTRATIVE CODES 69A-3.012  
(Aldridge - Benge Firefighter Safety Act)**

**PALM HARBOR FIRE RESCUE**  
250 WEST LAKE RD  
PALM HARBOR, FL, 34684  
P: (727)-784-0454  
F: ((727)-785-9131  
[WWW.PALMHARBORFD.COM](http://WWW.PALMHARBORFD.COM)



- Structures with Light-Frame Truss **F**loor systems shall be marked with the letter **"F"**

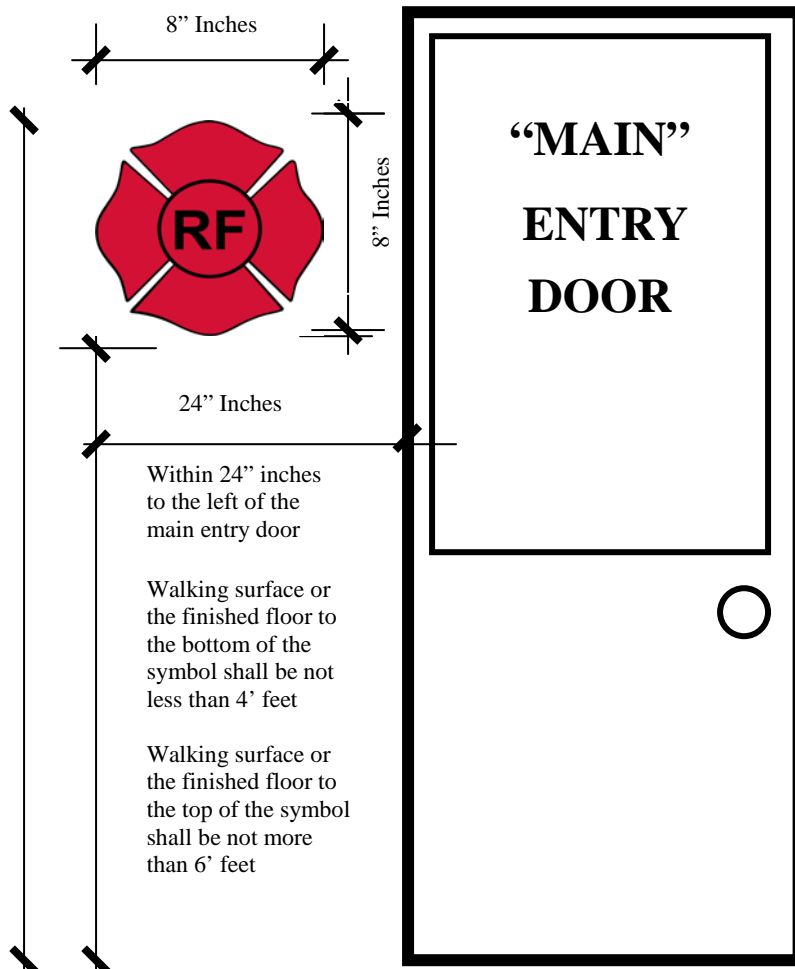

- Structures with Light-Frame Truss **R**oof systems shall be marked with the letter **"R"**



- Structures with Light-Frame truss **R**oof and **F**loor systems shall be marked with the letters **"R/F"**

**SIGN PARAMETERS**

- Symbols shall be weather proof and contrasting with background
- Maltese Cross shall be measured 8 inches horizontally and 8 inches vertically
- Maltese Cross shall be of a bright red reflective color
- Maltese Cross shall be within 24 inches to the left of the main entry door
- Maltese Cross shall be not less than 4 feet above grade or walking surface
- Maltese Cross shall be not more than 6 feet above grade or walking surface
- Additional signs shall be installed as determined by the AHJ / Fire Department (AHJ) = Authority Having Jurisdiction, (Palm Harbor Fire rescue)
- Large or multi-tenant buildings may require multiple signs spaced @ (+/-) 100' ft. or alternate locations approve by the AHJ to facilitate visibility and compliance with the intent of the adopted rule.